
TWIN KOOL| Промышленные воздушные завесы и воздушные завесы для холодильных камер

Характеристики



- Specially designed to be installed on doors of industrial cold stores and freezers with big temperature differences.
- The Twin Kool air curtain system has been designed to offer a versatile solution for any type of cold room. It has two jets of opposing air chambers that create additional space between the chamber and the pre-chamber. Thanks to the double barrier, this model becomes the perfect alternative to the TRIOJET SYSTEM air curtain when space is limited or this model is not an option.
- Самонесущая конструкция корпуса изготовлена из гальванизированной стальной пластины, покрыта структурным эпокси-полиэфирным белым покрытием RAL9016, в соответствии со стандартом.По желанию клиента возможно использование других цветов или нержавеющей стали.
- Большая входная решётка не требует интенсивного технического обслуживания.
- Анодированные алюминиевые выпускные лопасти аэродинамической формы, настраиваемые в пределах от 0 до 15º с каждой стороны.
- Малошумные центробежные вентиляторы двухстороннего всасывания приводимые в действие мотором с внешним ротором. 5 скоростей. EC модели укомплектованы вентиляторами с очень низким коэффициентом потребления.
- Тип “A” без нагрева, только вентилирование.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  • Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  • Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.
- Includes varnishing on the PCB to protect it from corrosion.

Спецификации


50Hz

	Без Нагрева	
Модель	**Номинальный Воздушный Поток** (m³/h)	**Рекомендуемая Высота Установки** (m)
TWIN KECG 3000 A	14400	9,8-13,8
TWIN KM 1500 A	5400	9,8-13,1
TWIN KM 2000 A	7200	9,8-13,1
TWIN KM 2500 A	9000	9,8-13,1
TWIN KM 3000 A	10800	9,8-13,1
TWIN KECM 1500 A	5520	9,8-13,8
TWIN KECM 2000 A	7360	9,8-13,8
TWIN KECM 2500 A	9200	9,8-13,8
TWIN KECM 3000 A	11040	9,8-13,8
TWIN KG 1500 A	6400	9,8-13,1
TWIN KG 2000 A	9600	9,8-13,1
TWIN KG 2500 A	11200	9,8-13,1
TWIN KG 3000 A	12800	9,8-13,1
TWIN KECG 1500 A	7200	9,8-13,8
TWIN KECG 2000 A	10800	9,8-13,8
TWIN KECG 2500 A	12600	9,8-13,8

60Hz

	Без Нагрева	
Модель	**Номинальный Воздушный Поток** (m³/h)	**Рекомендуемая Высота Установки** (m)
TWIN KECM 1500 A	5520	9,8-13,8
TWIN KECM 2000 A	7360	9,8-13,8
TWIN KECM 2500 A	9200	9,8-13,8
TWIN KECM 3000 A	11040	9,8-13,8

Размеры

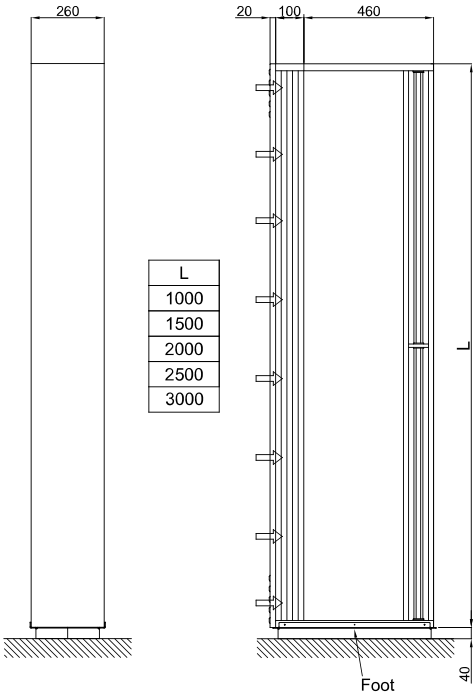

L
1000
1500
2000
2500
3000

